

ACS Series Wall Mount Intellevac Secondary Audio Control Units



The Intellevac ACS Secondary Audio Control Units are wall-mounted microphone units designed to work with the Intellevac ACU Audio Control Units, and they act as a secondary control panel mimicking the Intellevac ACU' audio controls. The ACU units have the same DVA control functions as the ACU.

The ACS has the Intellevac ACU built-in microphone, play DVA buttons, and a configurable number of microphone buttons. These buttons are used for routing the microphone announcements and DVA messages. A key-switch protects against unauthorised operation.

Several versions of Secondary Audio Control Unit are available, as fire or non-emergency microphones, and with different number of microphone buttons:

Fire Microphone: for connection to Intellevac ACU input 2.

- ACS20: 20 microphone buttons
- ACS40: 40 microphone buttons
- ACS60: 60 microphone buttons


Non-emergency Paging Microphone: for connection to Intellevac ACU inputs 3 to 8.

- ACS20S: 20 microphone buttons
- ACS40S: 40 microphone buttons
- ACS60S: 60 microphone buttons

Note that the Intellevac ACU inputs 3 to 8 have restrictions on the number of microphone buttons that can be supported.

For further details, and for information on other products please visit www.asl-control.co.uk.

APPLICATION DIAGRAM

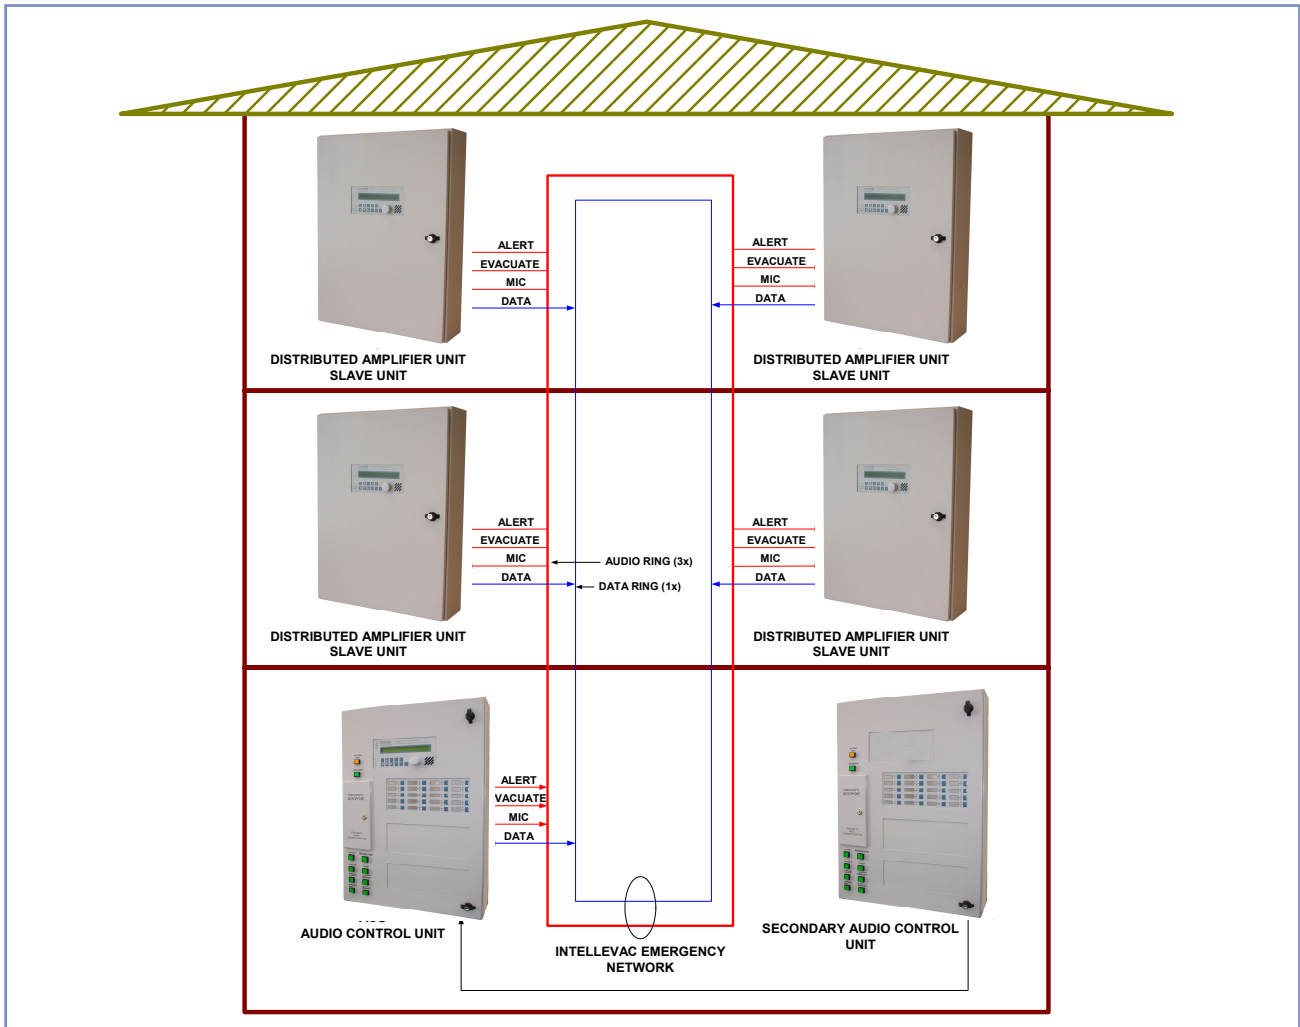

SPECIFICATION

General¹

ACS20 / ACS20S

Number of Microphone Buttons in conjunction with the Built-in Microphone20

ACS40 / ACS40S

Number of Microphone Buttons in conjunction with the Built-in Microphone40

ACS60 / ACS60S

Number of Microphone Buttons in conjunction with the Built-in Microphone60

All Variants

DC Supply Voltage..... 21 to 27.6 V
 Format..... Wall mounting box
 Colour..... Light grey with light blue annotation

Dimensions and Weight – All Variants

Dimensions (H x W x D).....700 mm x 510 mm x 155.2 mm
 Weight..... 19.5 kg

Environmental

Temperature
 (Storage and Operating)..... –5 °C up to +50 °C
 Humidity Range0 % to 93 % Non-condensing

¹ ACS20 / ACS40 / ACS60: HW bypass compatible Fire Microphone versions.
 ACS20S / ACS40S / ACS60S: Non-emergency Paging Microphone versions.



This equipment is designed and manufactured to conform to the following EC standards:
 EMC EN55103-1/E1, EN55103-2/E5, EN50121-4, EN50130-4, EN61000-6-3, ENV50204
 Safety EN60065

Manufacturer

Application Solutions Limited

Head Office: The Riverside Centre - Railway Lane - Lewes - East Sussex - BN7 2AQ - UK
 Tel: +44(0)1273 476608 Fax: +44(0)1273 478888

Voice Alarm Direct: Tel: +44(0)1273 405411 Fax: +44(0)1273 405415
 www.asl-electronics.co.uk

All rights reserved.

Information contained in this document is believed to be accurate, however no representation or warranty is given and Application Solutions Limited assumes no liability with respect to the accuracy of such information.

